




TECHNICAL INFORMATION SHEET: NEMOTO NP-17SHM Single Header Pellistor Gas Sensor



Specifications:

| | |
|--------------------------|--|
| Recommended Voltage: | 2.0V +/- 0.1V |
| Current Drawn: | 170 +/- 20mA |
| Zero Offset: | 0mV +/- 30mV |
| Sensitivity: | 30-38mV/% CH ₄ /Air |
| Range: | 0-60% LEL |
| Accuracy: | +/- 1%LEL(CH ₄) |
| Maximum Long Term Drift: | |
| Span: | < +/- 5% LEL/ 3 Months |
| Zero: | < +/- 1/2 mV/Month |
| Response Time: | T ₅₀ : 6.5 sec T ₉₀ : 20 sec |

Recommended Circuit:

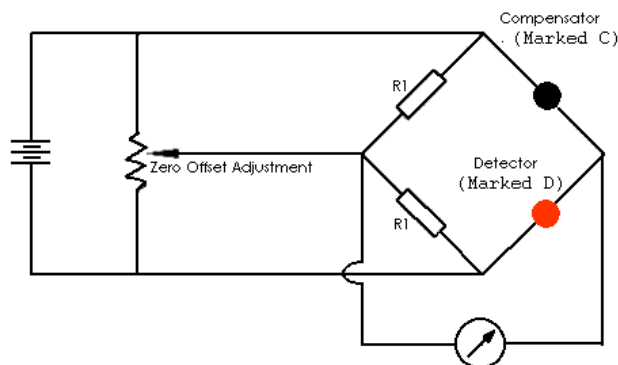

Note: The value R1 is arbitrary, since the function of R1 is to balance the bridge. 1K Ω is suggested.

| | |
|--------------------|------------------------------|
| Temperature Range: | -40°C to +150°C |
| Temperature Drift: | (-20°C to +70°C) |
| Zero: | < +/- 2%LEL |
| Humidity: | 0-100%RH, non-condensing |
| Humidity Response: | +/- 2%LEL |
| Linearity: | Effectively Linear to 60%LEL |

Test data on drift, poisoning, temperature performance, linearity will be available on the Characterisation Document NP-17SHM-CD.

General Description

The Nemoto NP-17SHM is a catalytic (pellistor) type flammable gas sensor supplied as a matched pair of pellistor elements mounted on a single header and protected by a metal mesh enclosure and can.

The sensor detects and measures the presence of flammable gases and vapours in air, in the range 0-60% of the Lower Explosive Limit (LEL) of the gas or vapour being measured. Designed as a lower cost alternative to the twin-header NP-17 device, yet an improvement from the NP-17S the NP-17SHM may be used as the sensing platform in fixed flammable gas detection systems up to 150°C.

The NP-17SHM exhibits excellent long term zero and sensitivity stability and a high level of resistance to catalytic poisons. The highly automated manufacturing procedure employed by Nemoto results in a repeatable reliable sensor which, unlike similar devices, requires no trimming resistor to enable the detector to be matched with a compensator.

Nemoto has a policy of continuous development and improvement of its products. As such the specification for the device outlined in the data sheet may be changed without notice



Sensor Structure and Dimensions:

